


# SUPERSTAR LED

MODEL 1280

THE LED FOLLOWSPOT HAS ARRIVED!

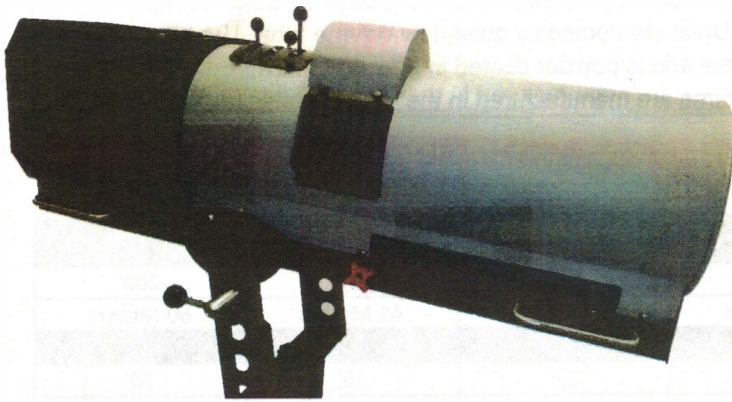

Beam Angle: 7°-15°

## LED CLASS LEADING OUTPUT

### FEATURES

#### 600 WATT LED

- Internal Electronic Flicker Free Power Supply
- Trombone for Variable Focal Optics
- Smooth DMX and Local Dimming
- Fine Focus to Soften & Harden Edge
- Includes 3 Legged Base with Casters & Leveling Jacks
- Internal 6- Color Boomerang
- Quiet Fan Cooling

Lycian advanced technology brings the the brightest LED made to the entertainment lighting world. Enjoy the benefits of green technology without sacrifice. Brilliance with a clean beam the Superstar LED runs comfortably cool. Get the best of all world's with an LED that's brighter than the competition's arc followspots while sipping electricity.



PO Box 214 Sugar Loaf NY 10981 USA  
+1 (845) 469-2285  
www.lycian.com



# SUPERSTAR 600, MODEL 1280

## Architects & Engineers Specifications

The luminaire is a 600 watt LED followspot. The spot diameter shall be controlled by a top-mount lever which opens and closes a nichrome steel iris. The unit shall include a top operated 3 plate sliding fader and a 6 color, self-cancelling color boomerang. A 600 watt LED with heat sink is housed in the rear of the head Optical quality lenses complete the optical system. The Superstar 600 LED utilizes an electronic switching power supply. The power supply is integrated into the followspot head. A 12 foot power cord with NEMA 5-15 is included. A 4 legged folding base is included. Units are cooled by quiet, low volume fans. The housing is constructed of extruded aluminum and cold rolled steel and is powder coated in grey and black. The Lycian Superstar 600 LED shall be specified. Fixtures are manufactured in the United States of America.

## Superstar 600 LED Photometrics

	60'	80'	100'	150'	200'
Distance Feet	60'	80'	100'	150'	200'
Distance Meters	18 Meters	25 Meters	30 Meters	45 Meters	60 Meters
Spot Dia. Feet	5'	8'	12'	15'	20'
Spot Dia. Meters	1.5	2.4	3.7	4.9	6.1
Flood Dia. Feet	15'-7"	20'-8"	26'-1"	39'-1"	
Flood Dia. Meters					
FC Spot	556	313	200	89	50
Lux Spot	5,985	3,369	2153	958	538
FC Flood	133	75	48	21	
Lux Flood	1432	807	517	226	

Beam Angle 7° - 15°

Superstar 600 LED Head Dimensions	Electrical Compatibility	Order Code
Head Length- 54" (137 cm) Max. Width inc. Controls 17" (43 cm) Head Depth 18-1/4" (46.4 cm)	100-120V, 50/ Hz60 208-240V, 50/60 Hz  Electric Consumption 4.58A @ 115V Auto switching	<b>Model 1280, Superstar 600 LED</b>  Ships with head, Neutrik connector, power cord, yoke and 4 legged folding base.

Weight: Head & Yoke 163 lbs. (74 Kg)

SPL= 40db @ 1 meter



[www.lycian.com](http://www.lycian.com)

PO Box 214  
 Sugar Loaf, NY 10981 USA  
 Tel. +1 845 469-2285

Specifications subject to change without notice