

# THE PROFESSIONAL SERIES

1295  
ELT 3/4K



Designed for **distance**. The ultimate **long-throw followspot**.

## Followspot Features:

- Separate slot for diffuser, UV or correction filter
- Center mounted six-color boomerang
- Single-lever trombone with quarter-turn lock
- Operable from left or right side via dual controls and reversible boomerang
- Elapsed time meter
- Ball bearing suspension for smooth and easy pan and tilt
- Rapid tilt balance adjustment and adjustable counterweight for customized balance
- Ammeter and control for lamp current
- Easy access for cleaning and maintenance

All 1295 ELT 3/4K followspots include:  
Head, Power Cord, Yoke, 3 or 4-Legged Base with locking casters and leveling jacks

### Additional features include:

Dichroic "cold mirror" reflector  
Optical grade lenses  
Gobo slot  
A4 iris  
Chopping shutter

Fader  
Quick focus knob  
Available with 3-legged folding base or  
4-legged rigid base



# 1295 ELT 3/4K

The 1295 ELT 3/4K features a variable focal length zoom lens system with a rapid focus knob on both sides of the spotlight allows focus within four revolutions. Top-mounted controls for the iris, fader, and shutter, along with dual zoom controls and a reversible color boom, enable easy right-to-left operation conversion. The electronic power supply is housed separately, connected to the spotlight via multi-pin and Camloc connectors. Cooling is provided by three quiet blowers. A slide control adjusts the tilt balance for individual operator's preference. The body is made of cold-rolled sheet steel and aluminum extrusions, finished in a black wrinkle powder-coated finish.

## Photometrics:

### Distance:

Feet	100'	150'	200'	300'	400'
Meters	30	46	61	92	122

## 3000-Watt Lamp

### Spot Diameter:

Foot Candles	2,339	1,040	585	260	146
Lux	25,177	11,194	6,297	2,799	1,572
Min Diameter	1'/30cm	1.5'/46cm	2'/61cm	3'/92cm	4'/102cm
Max Diameter	6'/1.8m	9'/2.7m	12'/3.6m	18'/5.4m	27'/8.1m

### Flood Diameter:

Foot Candles	290	129	73	32	18
Lux	3,122	1,189	786	344	194
Max Diameter	15'/4.6m	22.5'/7m	30'/9.2m	45'/13.7m	67'/20m

## 4000-Watt Lamp


### Spot Diameter:

Foot Candles	4,580	2,035	1,145	509	286
Lux	49,299	21,905	12,325	5,479	3,078
Min Diameter	1'/30cm	1.5'/46cm	2'/61cm	3'/92cm	4'/102cm
Max Diameter	6'/1.8m	9'/2.7m	12'/3.6m	18'/5.4m	27'/8.1m

### Flood Diameter:

Foot Candles	1,169	520	292	130	73
Lux	12,583	5,597	3,143	1,399	786
Max Diameter	15'/4.6m	22.5'/7m	30'/9.2m	45'/13.7m	67'/20m

### Beam Angle 3° - 8.5°

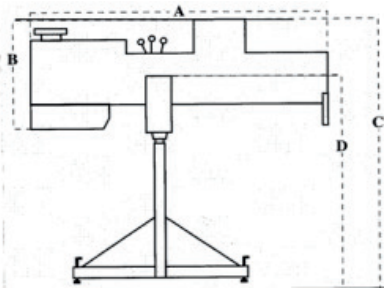

- A. Head Length 74.75" (1.9m)
- B. Head Height 29" (73.6 cm)
- C. Overall Height with Base 67" (1.7m)
- D. Height of Pivot 51" (1.3m)

- Width of Base 34" (86 cm.)
- Max Width of Head, inc. controls 20-1/2" (52 cm.)
- Head Weight 183 lbs. (83 Kg)
- Base Weight 74 lbs (33.5Kg)
- Ballast Weight 75 lbs. (34Kg)

### Electrical Compatibility:

30 Amp service required for 3000-watt lamp use

50 Amp service required for 4000-watt lamp use

Outbound electrical power supply operates at 205-240V AC, 50 or 60 Hz