


THE LED SERIES

1285
Superstar 1400

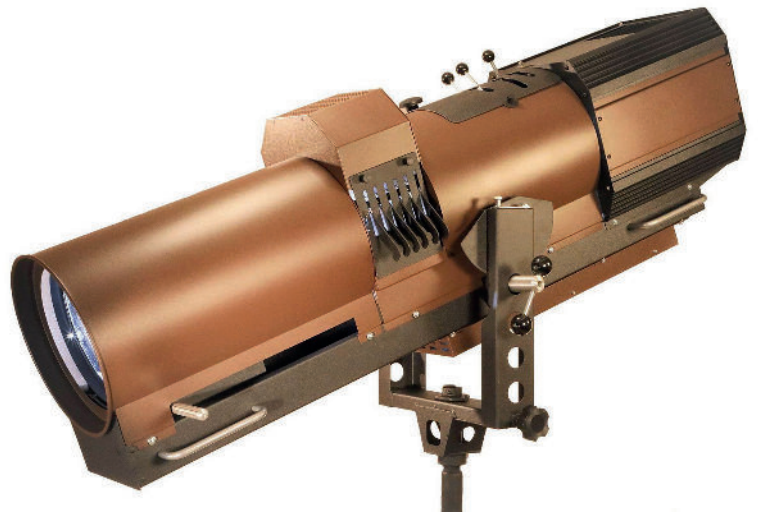

An **innovative, powerful** long-throw LED designed for professional theaters and arenas.

Lycian once again meets the evolving demands of the entertainment industry with the Superstar 1400 LED followspot. It combines exceptional electrical efficiency with unparalleled versatility in one compact design. Its impressive spot-to-zoom ratio ensures consistent output, no matter the trombone position. A wide range of controls and DMX dimming options make this followspot a standout choice.

Followspot Features:

- 1400 Watt LED
- Auto Switching Internal Electronic Power Supply
- Variable Focal Optics
- Local and Remote DMX Dimming
- Easy Reach Controls
- Internal 6-Color Boomerang
- Gobo Slot
- Horizontal and Vertical Shutters
- Frost Filter

All Superstar 1400 (Model 1285) followspots include:
Head, Power Cord, Yoke, 4-Legged Folding Base with locking casters and leveling jacks



1285 Superstar 1400

The Superstar 1400 is a 1400-watt LED followspot with all controls conveniently located on top for ease of use, including iris, dimming (also available via DMX), horizontal and vertical shutters, and frost. The fixture features a 6-color internally mounted self-cancelling color boomerang. A 1400-watt LED is housed at the rear of the unit, with optical quality lenses completing the optical system. The electronic power supply is integrated into the followspot head. The unit is cooled by quiet, low-volume fans, and the housing is constructed from extruded aluminum and cold-rolled steel, powder-coated in sleek black.

Photometrics:

Distance:

Feet	100'	200'	250'	300'
Meters	30.5	61	76.2	91.5

Spot Diameter:

Feet	7'	14'	17' 5"	28'
Meters	2.1	4.2	5.3	8.5

Flood Diameter:

Feet	18' 7"	37' 3"	46' 7"	
Meters	5.7	11.4	14.2	

Spot:

Foot Candles	650	163	104	72
Lux	6,990	1,720	1,080	775

Spot Focus:

(Iris down)	8"	16"	20"	24"
-------------	----	-----	-----	-----

Flood:

Foot Candles	370	92	54	
Lux	3,980	990	581	

Beam Angle 3.9° - 11°

Lamp Type

LED

1400-Watts

20,000 Hours

Dimensions:

Head Length: 72"
Max Width w/ Controls: 19-1/2"
Head Depth: 18-1/4"
Head Weight: 137 pounds

Electrical Compatibility:

90V-250V, 50/60Hz
Draw: 7 amps at 208V
Draw: 13.5 amps at 110V