


# THE LED SERIES

**1281**  
Superstar 1000

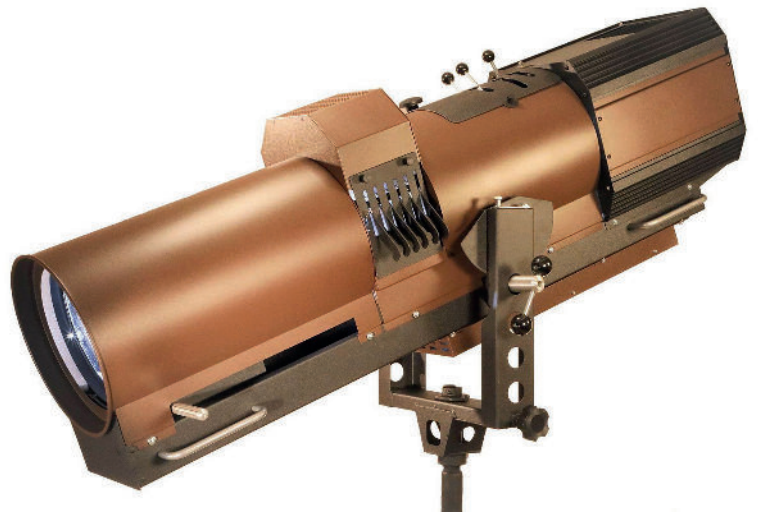

## **Bright & Powerful: Elevating LED Technology to New Heights**

Lycian's advanced technology takes LED performance to the next level with the Superstar 1000. This 1000-watt LED followspot combines green technology with brilliant output, offering clean, crisp light that can be easily shaped using Lycian's intuitive top-mounted controls for exceptional versatility. Enjoy the power of a followspot capable of replacing moderate-powered arc units, all while maintaining an environmentally conscious design.

### **Followspot Features:**

- 1000 Watt LED
- Internal Electronic Power Supply
- Variable Focal Optics
- Quiet Fan Cooling
- Fine Focus Mechanism
- Internal Self-Cancelling 6-Color Boomerang
- Mechanical Dimming
- Local and Remote DMX Dimming

All Superstar 1000 (Model 1281) followspots include:  
Head, Power Cord, Yoke, 4-Legged Folding Base with casters and leveling jacks



# 1281 Superstar 1000

The Superstar 1000 is a 1000-watt LED followspot with precise spot diameter control via a top-mounted lever that adjusts an A4 iris. It also features a top-mounted fader lever and an internally mounted self-cancelling color boomerang. The 1000-watt LED is housed at the rear of the head, with optical quality lenses completing the optical system. The electronic power supply is integrated into the followspot head for a compact design. The unit is cooled by quiet, low-volume fans, and the housing is constructed from durable extruded aluminum and cold-rolled steel, powder-coated in black.

## Photometrics:

### Distance:

Feet	100'	125'	150'	200'
Meters	30.5	38	45.7	61

### Spot Diameter:

Feet	8.9'	11.1'	13.3'	18.9'
Meters	3.1	3.9	4.7	6.2

### Flood Diameter:

Feet	24.5	30' 6"	36' 7"	48' 9"
Meters	7.5	9.3	11.2	14.9

### Spot:

Foot Candles	338	216	150	85
Lux	3,660	2,580	1,610	915

### Flood:

Foot Candles	119	76	53	30
Lux	1,290	818	570	323

### Beam Angle 5° - 14°

## Lamp Type

LED	1000-Watts	20,000 Hours
-----	------------	--------------

## Dimensions:

Head Length: 57-1/2"  
Max Width w/ Controls: 17"  
Head Depth: 18-1/4"

## Electrical Compatibility:

100V-240V  
50/60Hz